

LumiWING-3 3-Panel/4-Color LED Fan Effect

Lumicraft



The hottest 3-in-1 effect from Lumicraft – the **LumiWING-3** sends fans and beams through its 3 large lenses into the whole room, creating a stunning 100 degree-coverage of any mid-sized stage or dancefloor with powerful rays of light from its 360 superbright LEDs in 4 colors – red, green blue and white. The highly diversified patterns can either be run in auto mode, sound-to-light mode or be called off by the sophisticated DMX implementation. A unique pole mount system allows to mount this effect on the same stand as a speaker. Another true crowd mover!


- 360 ultra-bright LEDs (90 Red, 90 Green, 90 Blue, 90 White)
- LEDs arranged in 3 individually controlled panels
- 3 Optical PMMA-grade Fresnel lens for superb area coverage
- Five operation modes: Automatic (internal 120BPM clock), Sound-to-Light (through in-built microphone), Slave (synch and asynch), 3-channel DMX and 1-Channel DMX mode.
- Unit acts as Master in Automatic and S2L mode, generating DMX signals for connected slaves. Offset of 1/2/3/4 Beats is selectable for the slave vs. the master if slave is in asynch mode.
- 1-channel DMX mode for easy on/off functionality and most common settings via DMX
- 3-channel DMX mode with access to 144 pictures, 99 patterns, 10 sequences, S2L and strobe
- Easy-to-operate user interface with 3 buttons and LED display
- Road-proof metal case with sturdy bracket
- Unique pole-mount fastening system
- AC Input and Output
- Wide-range switch mode power supply
- CE compliant, ROHS compliant



Fan Effects



Tunnel Effects



Laser Effects

Specifications

LEDs

Type: 5mm 1-chip 0.06W
 Quantity: 360 pcs.
 Distribution: 90 R, 90 G, 90 B, 90 W
 (in 3 panels)
 Optics: 3x Secondary, Fresnel

Control

Control protocol: DMX512 (1990)
 In/Output: 3-pin XLR (F/M)
 Sound-to-Light: AGC circuit

Power

Power supply: 90-250V~/50-60Hz
 Consumption: max. 28W

General

Size WxDxH: 440x230x135mm
 (without bracket)
 Weight: 3.25 kg (net)


DMX Schemes

1-Channel scheme:
 CH1: 0..14 off
 15..149 Patterns (3 speeds)
 150..199 Patterns + Strobe
 200..255 Patterns Sound-to-Light

3-Channel scheme:
 CH1: 0..255 Picture/Pattern/Sequence
 CH2: 0..255 Speed/S2L Ratio
 CH3: 0..255 Strobe/Strobe speed

OEM options

- Side Panel user interface printing
- Packaging artwork

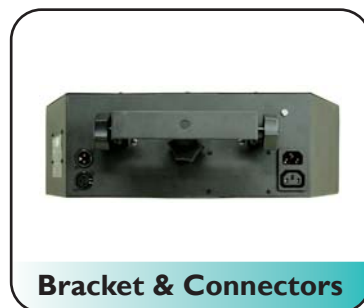

Bracket & Connectors



User Interface



Stand Mounting

