

# LumiPAR-39/DW3 DualWhite Indoor Fixture

# Lumicraft



## Specifications

### LEDs

Type	3W single-chip (700mA)
Quantity	39 pcs.
Distribution	18 warm + 21 cool white
Luminous output	4250 lm total
Optics	PMMA, 30° (40° opt.)

### Power Supply

Input	90-250V~ 50/60Hz
Power Cons.	max. 95W

### Control Electronics

Dim Modulation	PWM
DMX Control	4-CH (5-CH. optional)

### General

Dimension	D186 x L252mm (tubus)
Weight	2.4 kg net

### OEM options

- 5-channel DMX Mode
- Dispersion angle 40 degrees
- User interface/package printing



Black Silver

### Finishing Options

The **Lumicraft LumiPAR-39/DW3** is a Highpower-LED fixture for the specific purpose of generating white light with adjustable color temperature. Further, the comprehensive strobe modes make this unit a powerful white strobe! The custom firmware makes proper settings a breeze, and the innovative connection panel plus the silent hybrid cooling system provide the required versatility and reliability.

### Features:

- LED panel with 39pcs. of ultra-bright 3W High-Power LEDs: 18x warm white, 21x cold white
- Precision PMMA lenses with 30° dispersion angle in FOCENT™\*\* Ring (45° lenses optional)
- Total luminous output (mixed white, all LEDs at full brightness) 4250lm
- Silent hybrid cooling system (fan-assisted heatsink)
- Wide-range switch mode power supply and CDA™\*\* current drive array for LED panel
- IEC C14 input with detachable power cord plus IEC C13 power output
- Patented angled connection panel\* for ultimate connection ease and compact shape
- Convenient color-temperature preset mode with 10 useful presets and stand-alone dimmer
- Strobe-Mode with 10 internal speed levels
- 5 different DMX modes, with separate channels or combined balance channel for cold/warm white, with and without strobe, and with combined or separate dimmer/strobe channels
- DMX slave mode to easily connect several units to be controlled by the first unit in the chain
- Blue 7-segment display (automatic display-off mode after 30 seconds)
- Aluminum body, natural polished or black painted surface
- Dual aluminium bracket with hook mounting recess for hanging and standing operation

\* Protected by China design patent 200930081836.9, China utility patent 200920059834.4, Europe community design 001551508, US design patent pending, US utility patent pending. \*\*FOCENT / CDA are trademarks of Nuclus Holdings Ltd.

### 3 application options - one ease of use




Ceiling-to-Floor



Floor-to-Floor




Floor-to-Ceiling

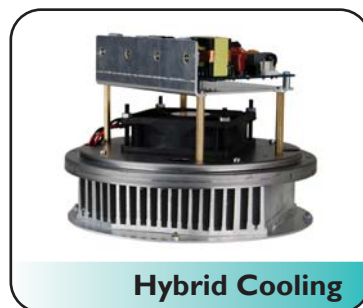

### Hybrid Cooling



### Connections

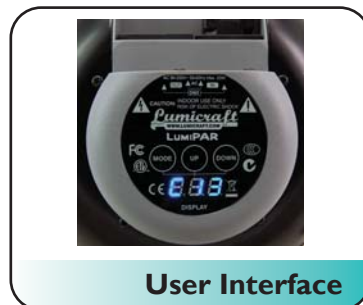

### User Interface

